


DRAINAGE FABRIC

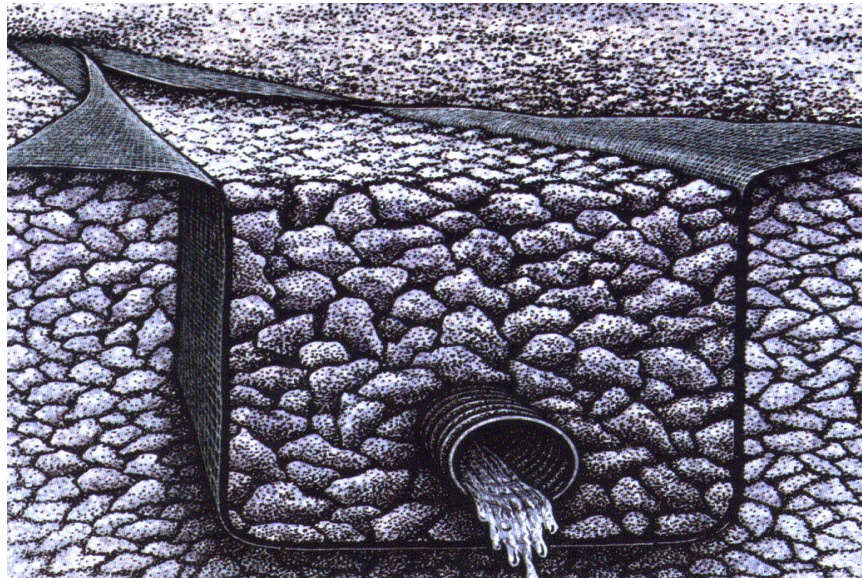

PROPERTY	TEST METHOD	MINIMUM AVERAGE ROLL VALUES ²	
		<i>English</i>	<i>Metric</i>
<u>Mechanical</u>			
Grab Tensile Strength	ASTM D4632	95 lbs	420 N
Grab Elongation	ASTM D4632	50%	50%
Puncture Strength	ASTM D4833	55 lbs	240 N
Mullen Burst	ASTM D3786	185 psi	1270 kPa
Trapezoidal Tear	ASTM D4533	40 lbs	175 N
<u>Hydraulic</u>			
Apparent Opening Size (AOS)	ASTM D4751	70 US Std Sieve	0.212 mm
Permittivity	ASTM D4491	2.00 sec ⁻¹	2.00 sec ⁻¹
Permeability	ASTM D4491	0.25 cm/sec	0.25 cm/sec
Water Flow Rate	ASTM D4491	110 gpm/ft ²	4480 l/min/m ²
<u>Endurance</u>			
UV Resistance (% retained after 500 hours)	ASTM D4355	70%	70%

Roll sizes: 3' x 100' & 6' x 100'

DRAINAGE FABRIC distributed by:



EROSION CONTROL, LINERS, GEOTEXTILES, BMP'S & SWPPP'S

3400 SE COLUMBIA WAY BLDG 43, VANCOUVER, WA 98661

PHONE (360) 699-1426

FAX (360) 699-1344

INFO@CSIGEO.COM

WWW.CSIGEO.COM